



GOUJON D'ANCRAGE R-HPT ZINC LAMELLAIRE

Modèle
45527

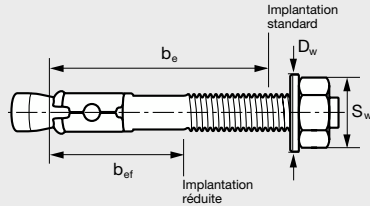

RÉFÉRENCES MEMENTO TECHNIQUE

9.5 Chevillage et ancrage



R-HPT ANCHORING STUD FLAKE ZINC
COATING FOR CRACKED AND UNCRACKED
CONCRETE

ANCLAJE MACHO R-HPT ACERO ZINC
LAMINAR PARA HORMIGÓN FISURADO Y NO
FISURADO

PERNO DI FISSAGGIO R-HPT ACCIAIO
ZINCATO LAMELLARE PER CALCESTRUZZO
FESSURATO E NON FESSURATO

REF	d (mm)	L (mm)	Sw (mm)	Dw (mm)	Lg (mm)	Bes (mm)	Befs (mm)	Tfs (mm)	Ber (mm)	Befr (mm)	Tfr (mm)
45527M8X65	8	65	13	17	25	-	-	-	40	32	15
45527M8X95	8	95	13	17	55	55	47	30	40	32	45
45527M8X115	8	115	13	17	75	55	47	50	40	32	65
45527M10X65	10	65	17	21	21	-	-	-	49	39	5
45527M10X80	10	80	17	21	31	59	49	10	49	39	20
45527M10X95	10	95	17	21	46	59	49	25	49	39	35
45527M10X115	10	115	17	21	66	59	49	45	49	39	55
45527M10X130	10	130	17	21	80	59	49	60	49	39	70
45527M12X80	12	80	19	24	30	-	-	-	60	48	5
45527M12X100	12	100	19	24	40	80	68	5	60	48	25
45527M12X150	12	150	19	24	90	80	68	55	60	48	75
45527M16X140	16	140	24	30	60	100	85	20	80	65	40
45527M16X180	16	180	24	30	100	100	85	60	80	65	80
45527M16X220	16	220	24	30	140	100	85	100	80	65	120
45527M20X125	20	125	30	37	50	-	-	-	99	79	5
45527M20X160	20	160	30	37	61	119	99	20	99	79	40
45527M20X200	20	200	30	37	100	119	99	60	99	79	80